



दि न्यू इन्डिया एश्योरन्स कंपनी लिमिटेड

(भारत सरकार का उपक्रम)

THE NEW INDIA ASSURANCE COMPANY LTD.

(Govt. of India Undertaking)

पंजीकृत एवं प्रधान कार्यालय : न्यू इन्डिया एश्योरन्स बिल्डिंग, 87, महात्मा गांधी मार्ग, फोर्ट, मुंबई - 400 001.

Regd. & Head Office : New India Assurance Bldg., 87, M.G. Road, Fort, Mumbai - 400 001.

CIN No. L66000MH1919GOI000526



Phone : 022 2270 8100

022 2270 8400

Website : www.newindia.co.in

21/09/2023

Tender No: 19/Est&Estb/Spot/23-24

TENDER NOTICE (SPOT QUOTATION)

The New India Assurance Co Ltd intends to invite spot quotations from our panel contractors (0-2 lac) for the construction of a Storm-water collection chamber with a manhole at Andheri Staff Quarters.

The panel contractors are required to make a visit to the site to verify the scope of the work and submit their bids to the Estate & Establishment Department, HO.

Important dates to be noted:

(11:00 AM)

Pre-bid meeting:

25th September 2023 (**Attending pre-bid meeting is mandatory.**)

Contractors failing to attend the pre-bid meeting will be debarred from participating in the tender)

Start Date of Bid Submission:

26th September 2023

End Date of Bid Submission:

3rd October 2023 **(04:00 PM)**

The quotes must be submitted in a sealed envelope only. The quote must be for the complete work.

The contractor with the lowest bid will be selected for the work.

The work has to be attended as per the attached BOQ only (see Annexure-II). No variation in the specification of the works mentioned in the BOQ is allowed.

Time allowed for the work: 20 days from the date of issue of the work order.

Payment Condition: After the successful completion of work, the selected contractor will have to submit the bill along with the photographs and satisfaction note of the site office in charge.

10% of the total amount of items no 1,2,3 & and 5 of BOQ will be held as retention amount for the defect liability period of 1 year.

10% of the total amount of items no 4 and 6 will be held as retention amount for the defect liability period of 2 years.

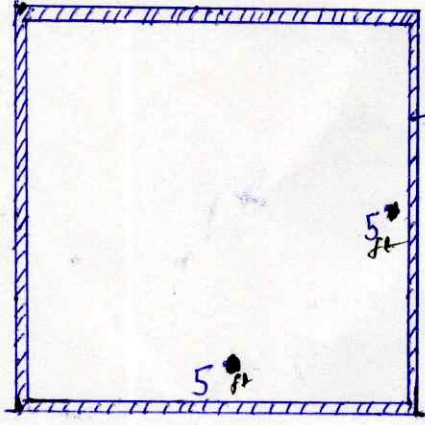
Bill found in order after successful completion of work will be processed immediately.

Defect liability/Warranty Period: The selected contractor will have to give a **warranty of 2 years for the submersible pump, pump starter, water sensor, and related electrical fittings and 1 year of warranty on all other works.**


Chief Manager
Estate Department

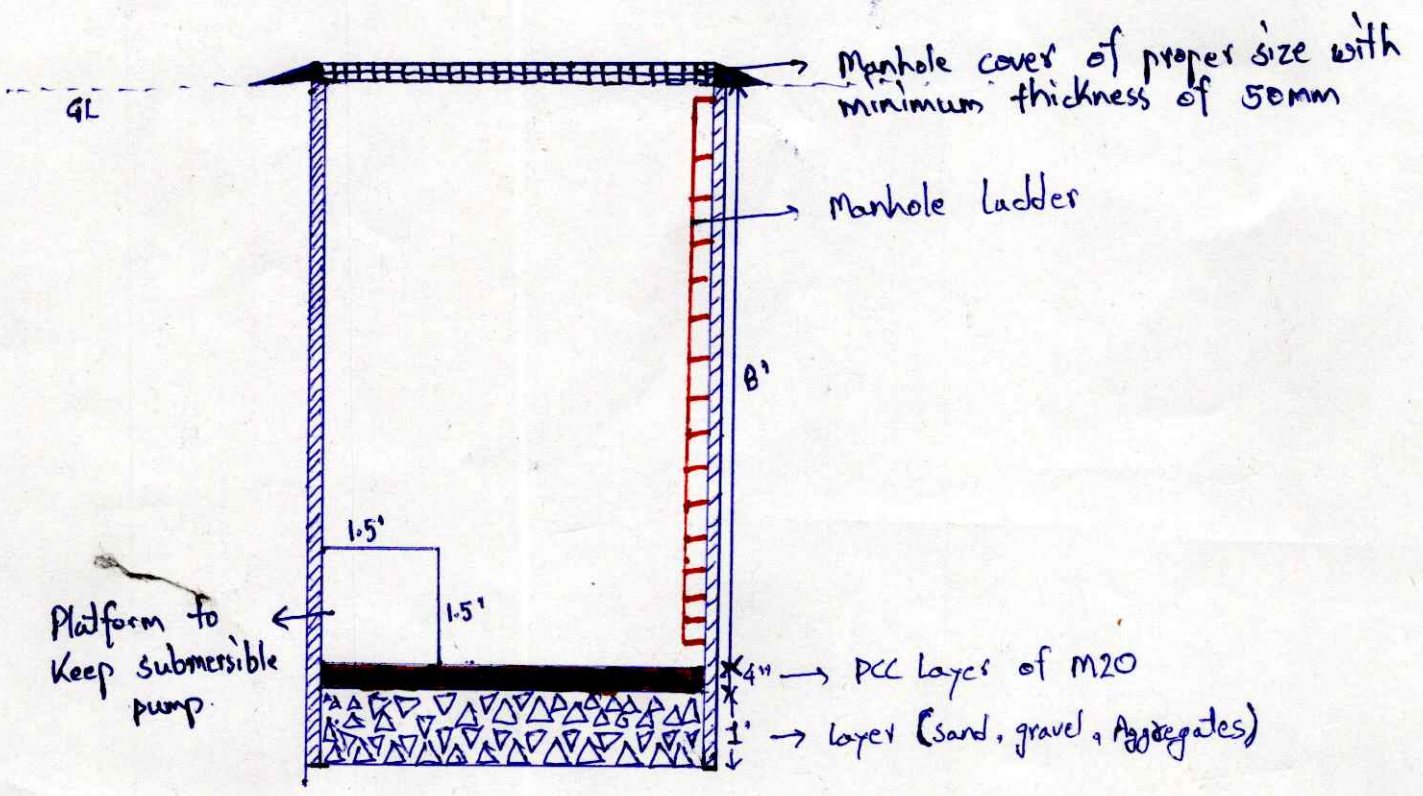

Construction of Storm Water Collection Chambers with Manhole at ASD:

Top View - Annex - 1



Wall thickness should be of one brick length + Plaster of 25mm

Side view



(Annexure-II) BOQ for construction of Waater collection chamber with manhole at ASC

S. No.	Description of Item	Unit	Quantity	Rate	Amount
1	Constructing a storm water collection chamber with manhole of 5 X 5 X 8 ft (L X B X H) (Interior dimensions). The work includes earth work to make a pit in the ground, Lining the same with brick wall of thickness of 1 brick length plus plaster 25mm on top. The bottom of the chamber should be filled with 1ft layer of Sand, Gravel, Aggregates and topped with 4" thick layer of PCC. A platform of (1.5 X 1.5 X 1.5)ft at the bottom for keeping submersible pump and refixing the removed paver blocks. SEE ANNEX-1 FOR DIAGRAM	No.	1		
2	P/F manhole ladder of G.S with Internal width 400mm, Overall width 440mm, Rung spacing 280mm, Stile 50mm x 20mm, Wall brackets 150mm stand off. Top rung shall be 450mm below manhole cover	No.	1		
3	Removable manhole cover of G.S of Proper size with frame	No.	1		
4	P/F 3 phase 440V 5 HP Kirloskar make submersible pump with all required electrical and plumbing fittings	No.	1		
5	P/F CPVC pipeline of 3" and all required fittings of Prince make to drain-out storm water from chamber with a motorised pump as per the site condition	rft	25		
6	P/F Pump Starter with with water sensor with required electrical fittings	No.	1		
	Total				

*All the rates should be exclusive of GST.

*Site visit is mandetory to participate in the tender.